

A Medium Size Detector for the ILC



... what used to be the TESLA or LD detector concept

Ties Behnke, DESY

A medium size detector for the linear collider:

The concept behind the TESLA detector
(similar to LD detector concept)

- precision tracking
- particle flow based event reconstruction

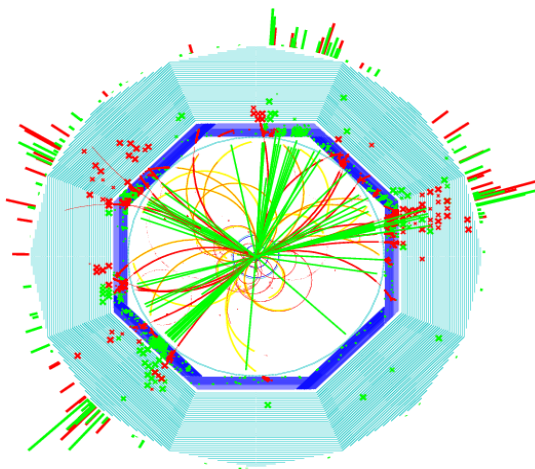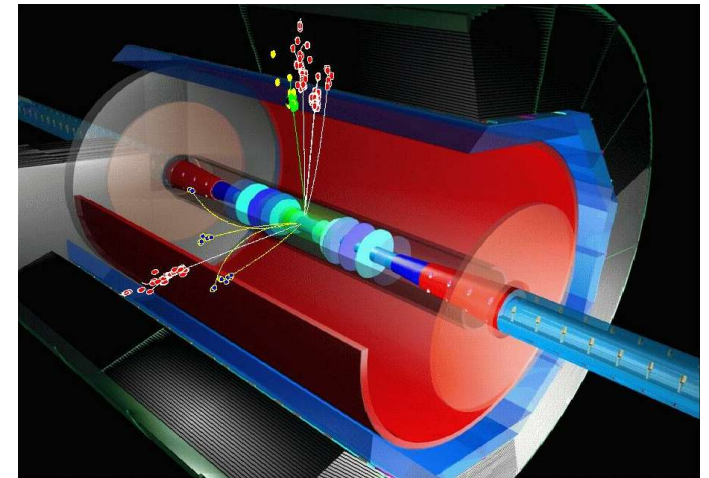

- Ways to proceed: global detector optimisation

The Precision Side: Tracking

Linear Collider precision physics:



Measurement of Higgs Mass (recoil method)
Top mass threshold measurements

Needed: excellent momentum resolution

Challenge: factor 10 better resolution than
at LEP (or Tevatron) detectors

- needs excellent resolution
- needs excellent control of systematics

Higgs recoil Signal for
changing tracker resolutions

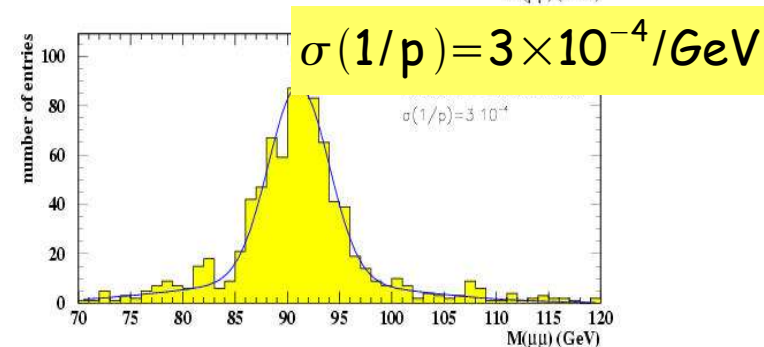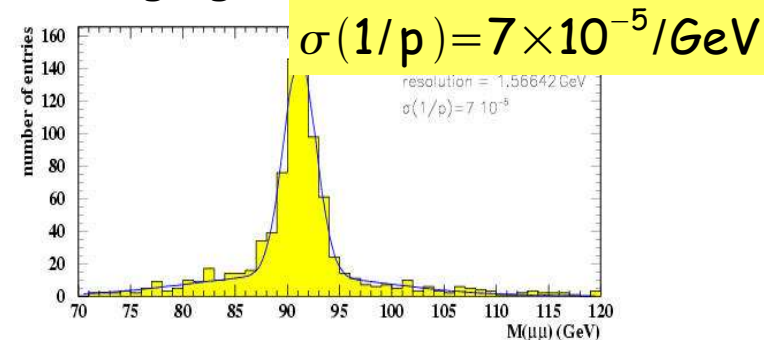


The Precision Side: Vertexing

Heavy Flavor Physics at the LC

Higgs branching ratio measurements

general flavour physics (top physics,)

Couplings to fermions:

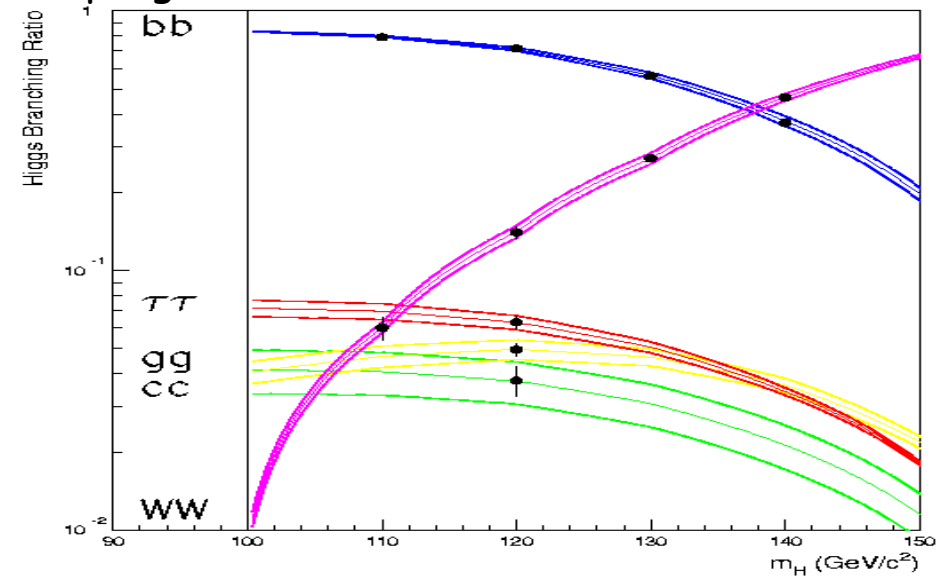

Needs excellent vertex detector $\delta(IP_{r\Phi i,z}) < 5 \mu m \oplus \frac{10 \mu m GeV}{p \sin^{3/2}(\theta)}$

Significant improvement over previous detectors (SLC)

A Precision Tracker

Ansatz

from the TESLA TDR:

(see e.g. Paolo Checcia's
talk at LCWS04)


large volume gaseous tracker

medium precision SI tracker
to join the two devices

high precision VTX

forward SI tracking for low angles

forward tracking behind TPC endplate

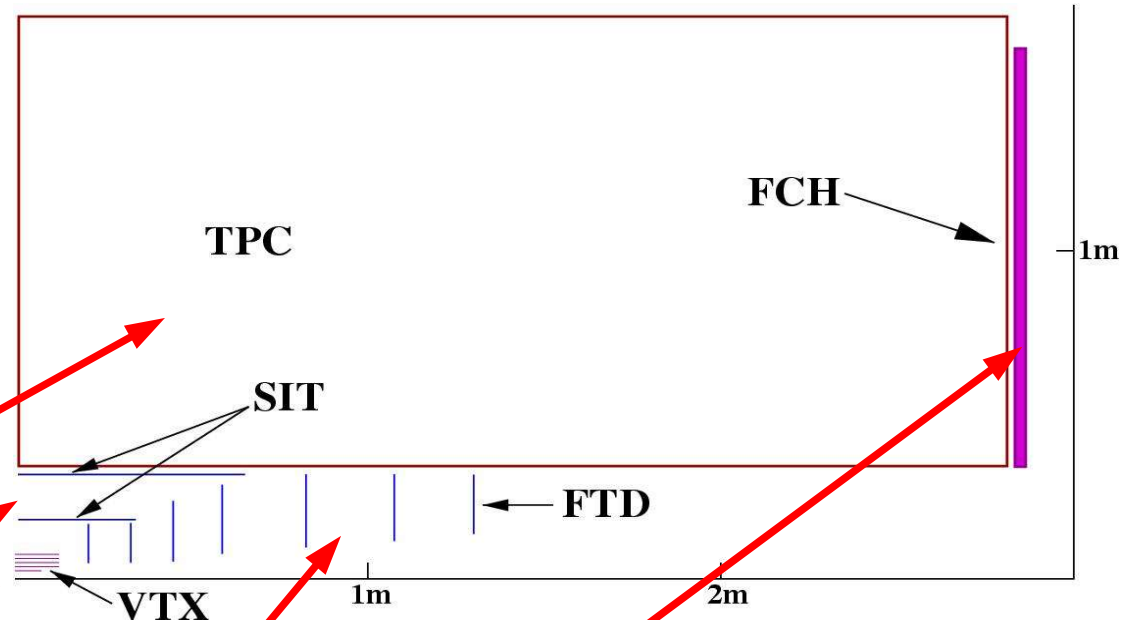

A Precision Tracker

Ansatz
from the TESLA TDR:

(see e.g. Paolo Checcia's
talk at LCWS04)

large volume gaseous tracker


medium precision SI tracker
to join the two devices

high precision VTX

forward SI tracking for low angles

forward tracking behind TPC endplate

result from simulation of complete
system, including backgrounds

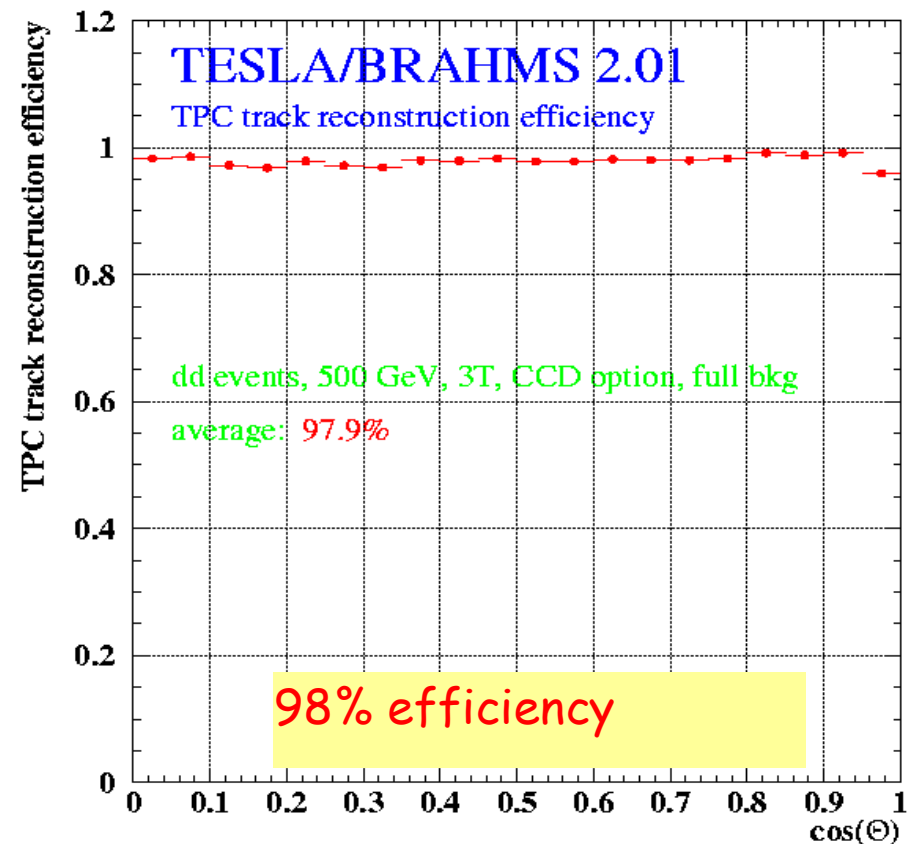


Why a TPC?

advantages of a gaseous detector:

- many space points (200 for current design)
- good precision
- TPC is true 3D device: very robust against backgrounds
- long lived particles (new particles)
- Thin (little material)

disadvantage:


- gas amplification structures needed
- HV needed (REAL HV in case of a TPC)
- "fairly" massive endplates seem unavoidable
- readout speed is limited by gas properties

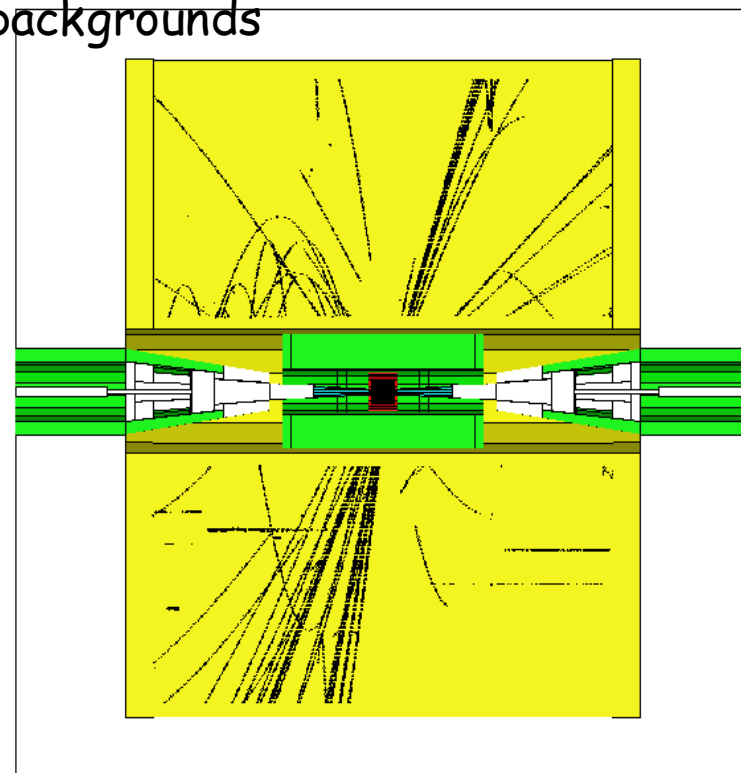

Why a VTX

High precision VTX detector

- unprecedented tagging of long lived particles
 - b-, c-tagging, ...
- first layer at lowest possible radius
- excellent coverage of the solid angle
- stand alone tracking

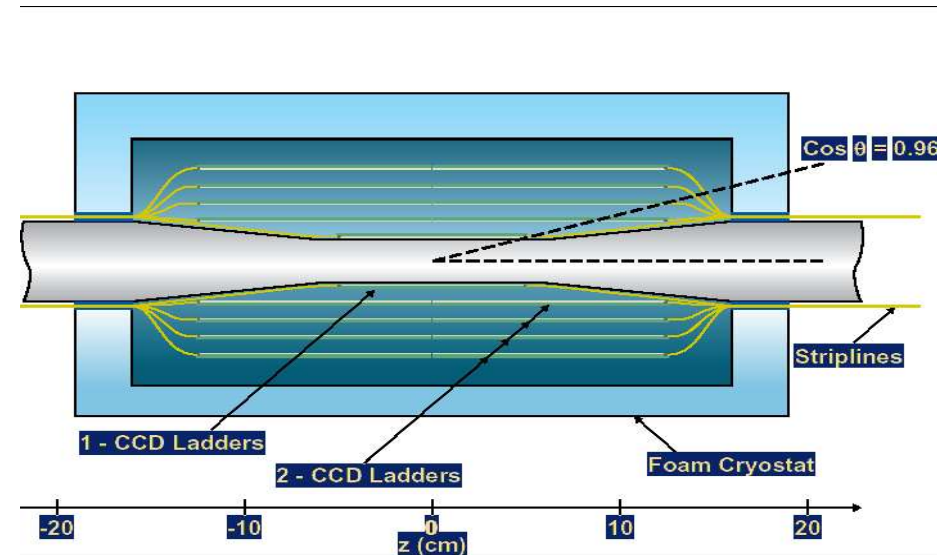

BUT: VTX detector is most prone to suffer from backgrounds!

- pattern recognition in VTX backed up by other detectors
- design VTX with enough layers to afford "loosing" the innermost one

Combining things

The complete tracking system:

- VTX to do precise vertexing
- TPC to do precise pattern recognition
- FTD (forward SI) for full coverage to small angles
- SIT to join the two
- possibly external precise detectors (SET, FCH) to help extrapolate


example:

efficiency to find a Kshort
without (blue)

with (red) intermediate SI tracker

Continuous coverage is important!

needed: system studies in addition
to single subsystem studies

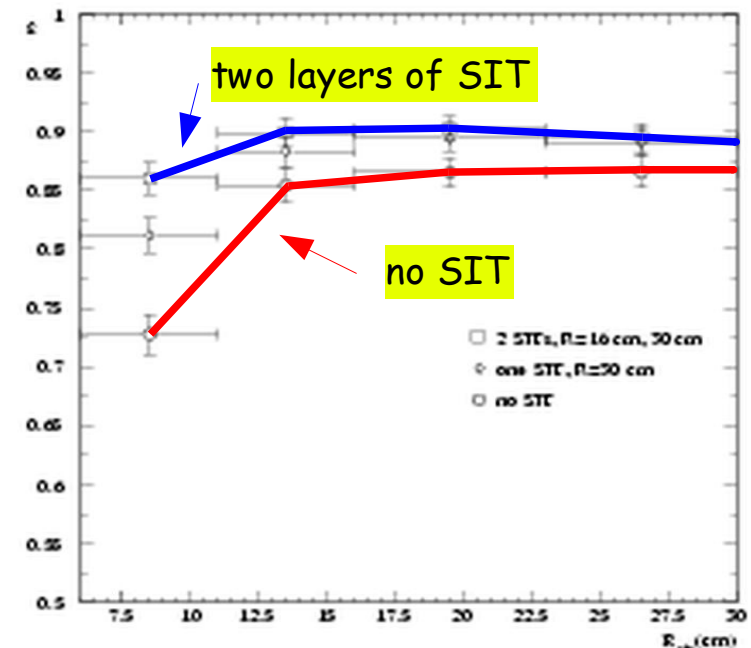

Precision Tracking?

VTX-SIT-TPC + FCH/SET: the current concept

optimization of the TPC:

- length and radius
- point resolution
- dEdx resolution
- material budget

example:

R=168cm: $\sigma = 190 \mu\text{m}$

R=122cm: $\sigma = 80 \mu\text{m}$

needed to obtain resolution

optimal SI components:

- number and parameters of SIT: do we need one? extend VTX?
- is the VTX optimized as it stands?
(some work has started, see this conference)
- backed up by external SI components (SET, FCH)?

Re-visit the goals:



What precision do we really need? Is the current goal

- too ambitious?
- not ambitious enough?
- Rely currently on (important) Higgs recoil. Other physics channels?

Event Reconstruction

Jet physics: event reconstruction need excellent jet-energy (= parton energy) reconstruction

WW-ZZ separation

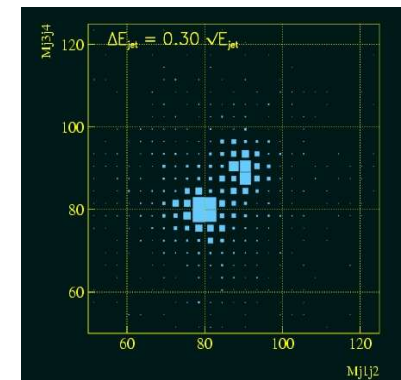
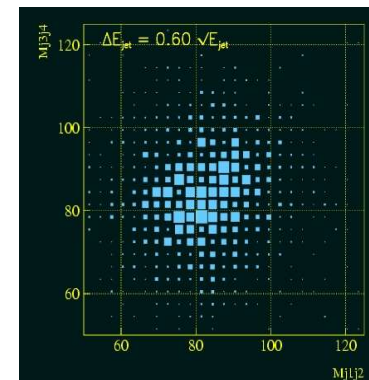


Complex hadronic final states:

- need complete topological event reconstruction
- Needed: new approach which stresses event reconstruction over individual particles:

Particle flow

Higgs self coupling reconstruction

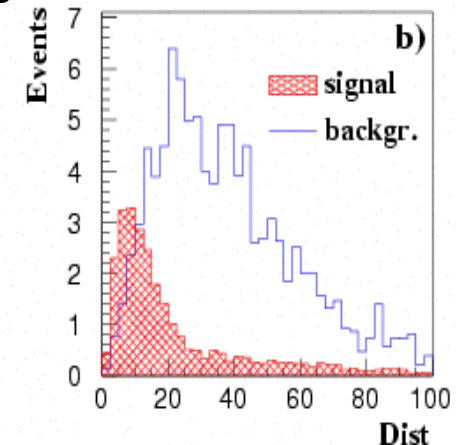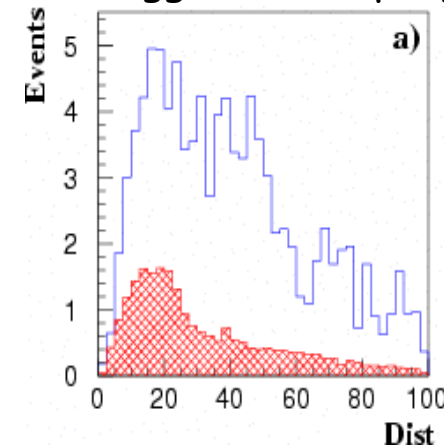


More like a revolution (though many have tried this before...)

Particle Flow: Basics


$$\sigma(\text{Jet}) = \sqrt{\sum \epsilon_T^2 E_i^4 + \sum \epsilon_{\text{ECAL}}^2 E_i + \sum \epsilon_{\text{HCAL}}^2 E_i}$$

Resolution is dominated by HCAL
and by
"confusion" resolution

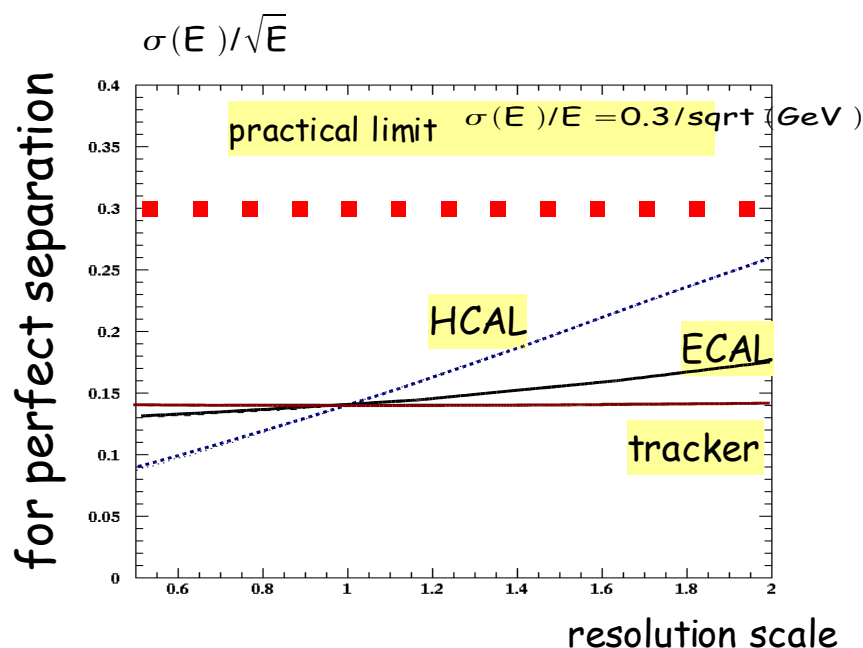

Effect of changing the
resolutions by a scale factor


Resolution tracker - Calorimeter

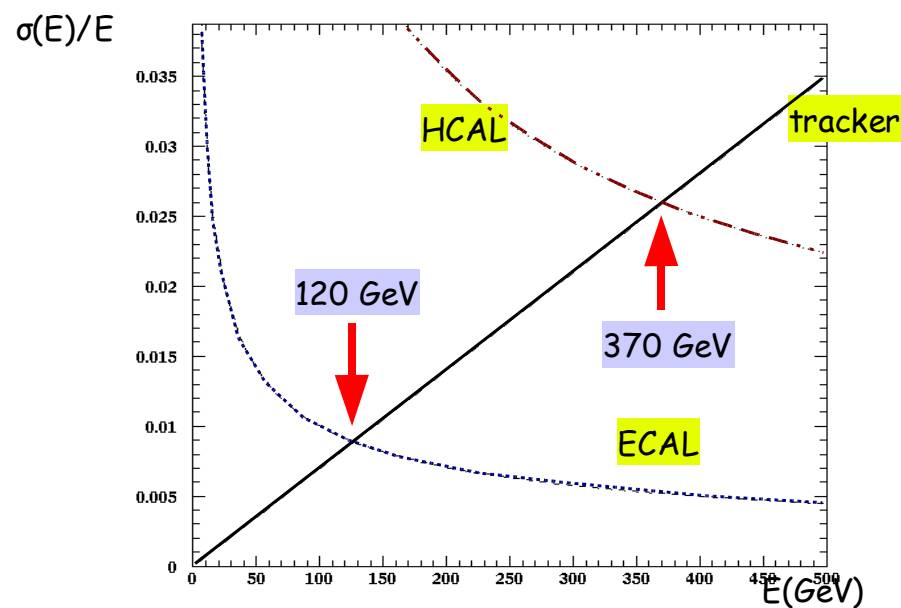



jet energy resolution is

- nearly independent from tracker res.
- driven by HCAL res
- ASSUMING:**
- perfect separation of particles

The current Calorimeter Concept

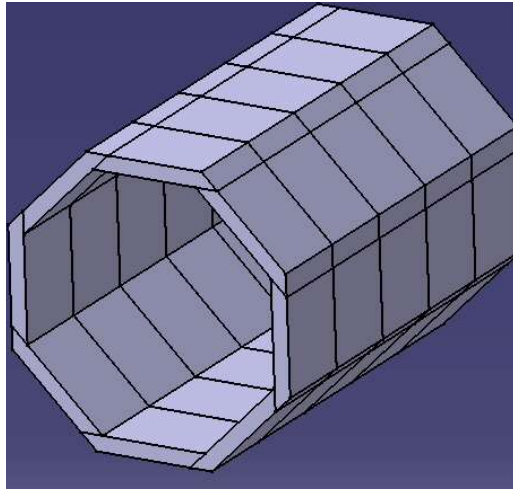


compact SI-W ECAL
highly modular
highly segmented

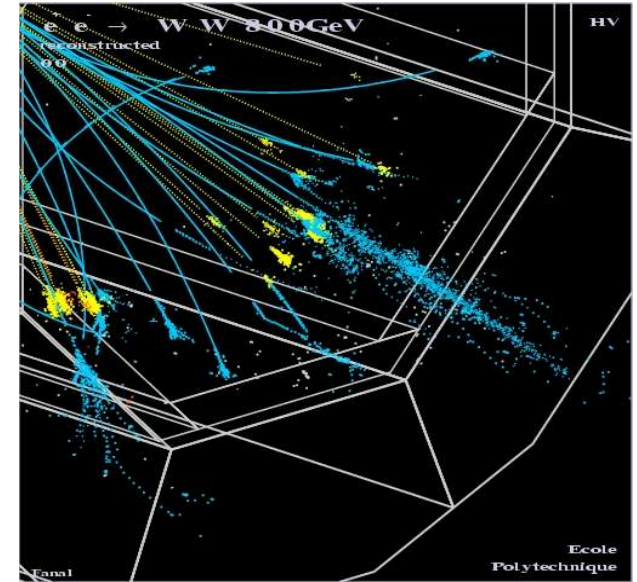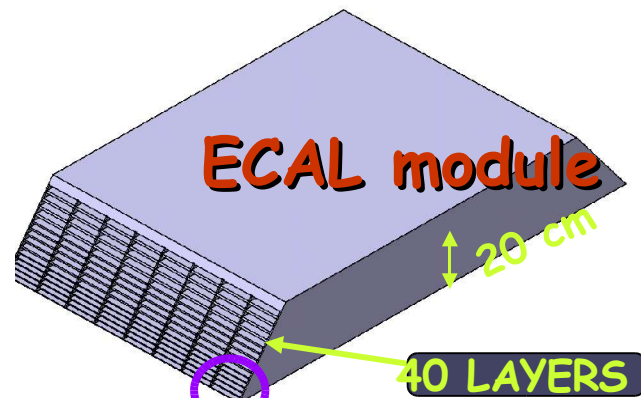

CALICE R&D group

with participants from
all three regions

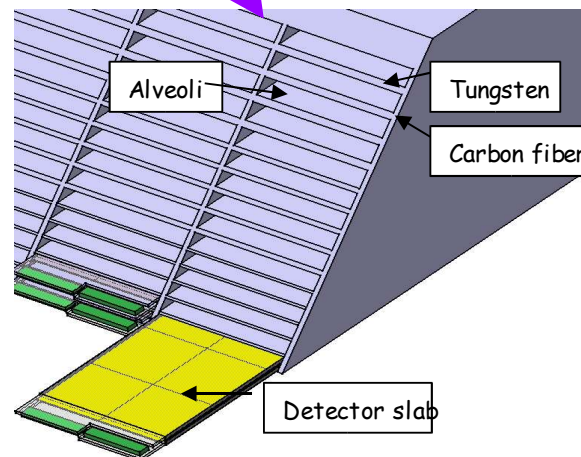

backed up by HCAL
within coil

Digital or analogue
highly segmented

Particle Flow Detector

Particle Flow has influenced the detector design:

- Large inner radius of ECAL to have good separation at “moderate” fields
- Both ECAL and HCAL inside the coil
- Excellent spatial resolution of ECAL and HCAL to maximize the “shower tracking”

ECAL: “obvious” choice is Tungsten absorber, fine grained readout (SI seems accepted technology)

HCAL: less obvious, different options are under study (analogue, digital)


But all push the granularity (= number of channels = cost) to new limits

Try to really optimize the size and granularity requirements to optimize the cost


Size Matters

Study confusion between charged and neutral particles as function of radius:

physics and CMS energy drive the relevant length scale

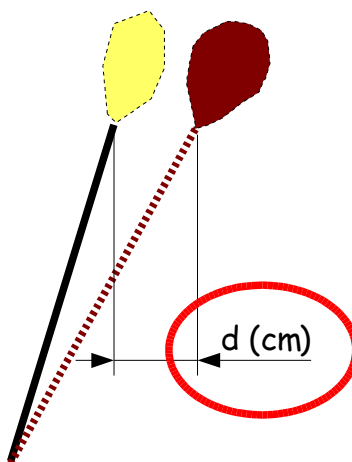

$e^+e^- \rightarrow ZH \rightarrow \text{jets}$ at $\sqrt{s} = 500 \text{ GeV}$

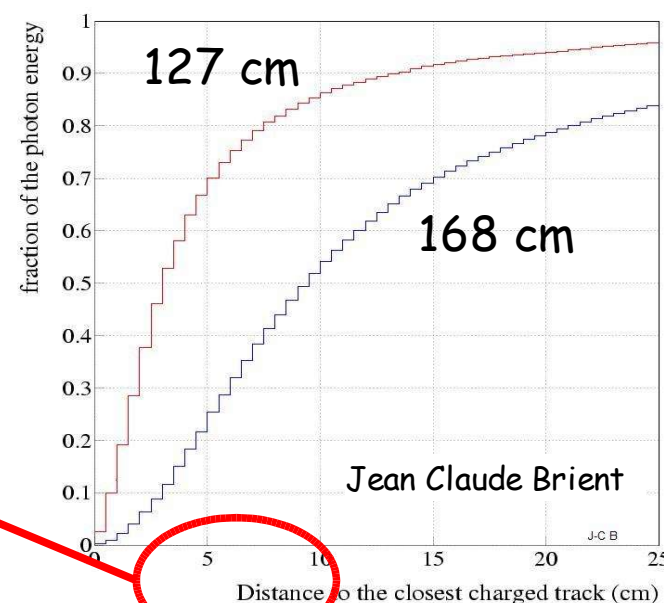

Energy deposited within "d" cm around a charged track

numbers:

$E=20 \text{ GeV}$ photon energy within 2.5cm of track for $R=168 \text{ cm}$ (4T, SiW)

$E=65 \text{ GeV}$ photon energy within 2.5cm of track for $R=127 \text{ cm}$ (5T, SiW)

Status of Detector Concept

Current “invariants” of the concept:

Tracking based on TPC plus Silicon Tracker

Fine grained ECAL and HCAL to optimize particle flow

aggressive coverage to very small polar angles

The rest of the parameter space is wide open:

Need to start a real optimization

Need to fold in the results from the detector R&D which will be coming in during the next few years

Detector R&D

Ongoing detector R&D with participants from the "Medium size detector"

VTX detector R&D (CCD, MAPS,)

LC-TPC (Europe - North America - Japan (recently joined))









only R&D activity relevant only to medium/ large size

CALICE (Europe - North America - Asia)

LC-CAL (Europe)

Forward Detector Collaboration (Europe Asia)

SiLC (Europe - North America - Asia)

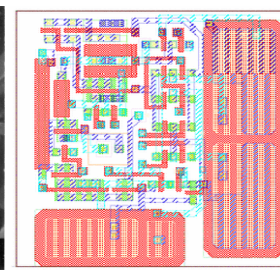

Detector R&D

Results from detector R&D will influence detector design heavily:

example: LC-TPC:

- Size of TPC is driven by precision requirement.

- Smaller TPC is possible, if we can achieve better resolution

- Have to demonstrate, that this is possible (not yet done...)

example: ECAL- HCAL

- Demonstration experiment is missing for the proposed system

- Modeling of hadronic shower needs to be verified

- Proposed construction needs to be verified

The detector R&D will play a crucial role in the further optimization of the detector (true for all concepts)

Summary

- The TESLA detector is a starting point for the design of a medium sized detector concept
- The concept stresses high precision, robust track reconstruction and excellent particle reconstruction capabilities (particle flow)
- The ongoing detector R&D together with improved and more realistic simulations will provide crucial inputs for the further development of this concept
- We are looking forward to exciting results over the next few years as things start to come together
- We need to make a real effort to make the tools available for the optimization study on a short timescale!